


Chip Ferrite Bead High Current Type Size 0603




-
- Compared to the FBA series, has low direct current resistance for
with 2 materials of different features
for countermeasures against everything from general signals to
high-speed signals.
- Performs well even in signal lines where low direct current resistance
is required.
-
-
-
-

Dimensions: [mm]

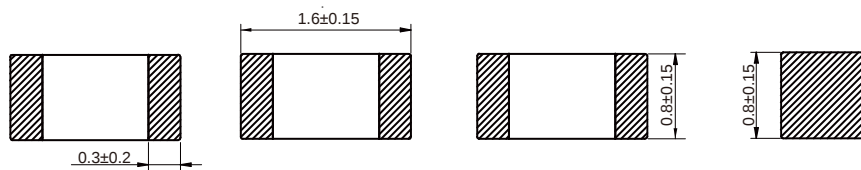

Land Pattern: [mm]



Electrical Properties:

	(Ω)		(Ω)	(mA)
FBHA0603S-300-502R	30	±25%	0.010	5000
FBHA0603S-600-402R	60	±25%	0.020	4000
FBHA0603S-800-302R	80	±25%	0.030	3000
FBHA0603S-101-302R	100	±25%	0.030	3000
FBHA0603S-121-302R	120	±25%	0.035	3000
FBHA0603S-151-252R	150	±25%	0.040	2500
FBHA0603S-221-232R	220	±25%	0.050	2300
FBHA0603S-301-222R	300	±25%	0.070	2200
FBHA0603S-471-202R	470	±25%	0.090	2000
FBHA0603S-601-202R	600	±25%	0.095	2000
FBHA0603S-102-152R	1000	±25%	0.150	1500

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$



