




SMD Low Profile High Current Molded Inductor Size 7050




- Molded type
-
-
-
-
-
-

Dimensions: [mm]

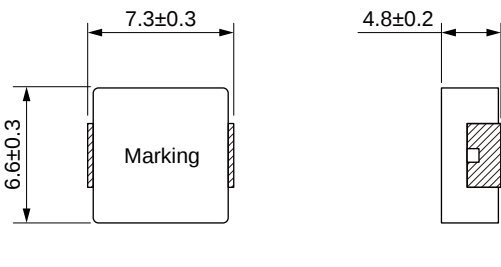

Land Pattern: [mm]















Electrical Properties:

Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Saturation current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
			16.5			
				16.5		
					11.2	
					43.5	
						51.5
					173	






°C ~ +125°C

°C

Typical Electrical Characteristics:

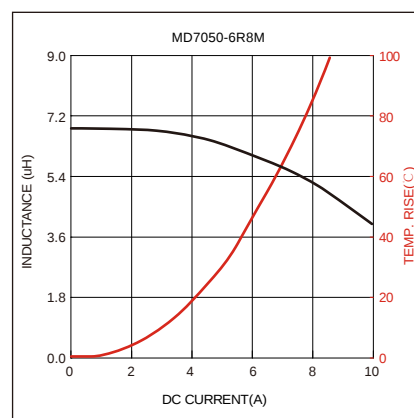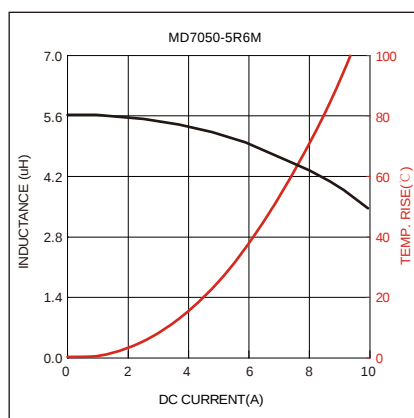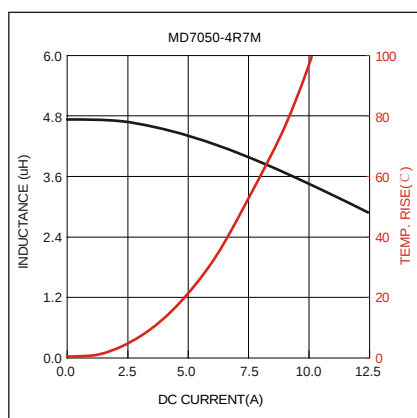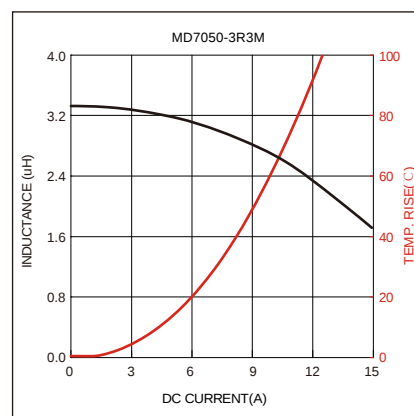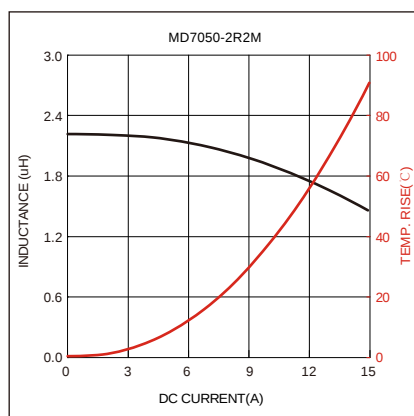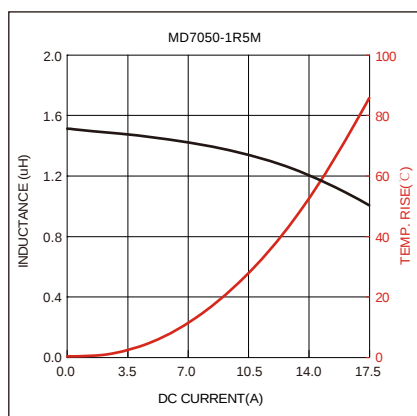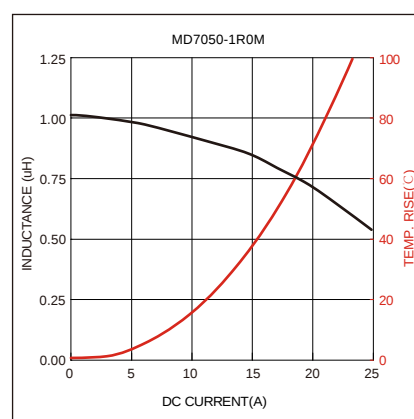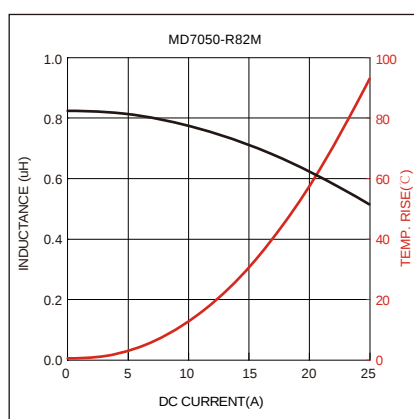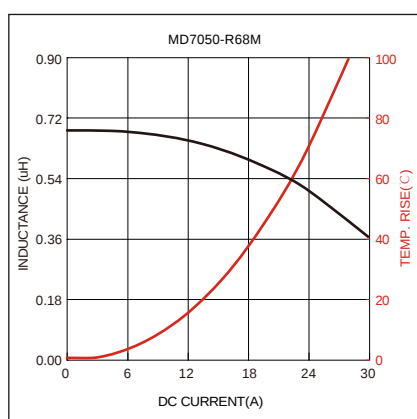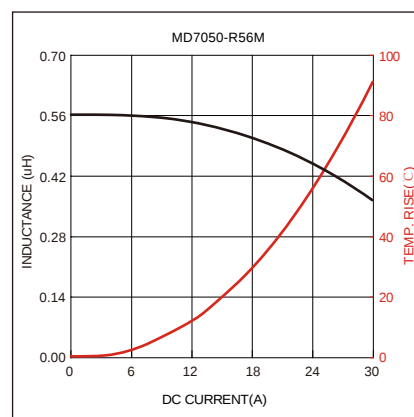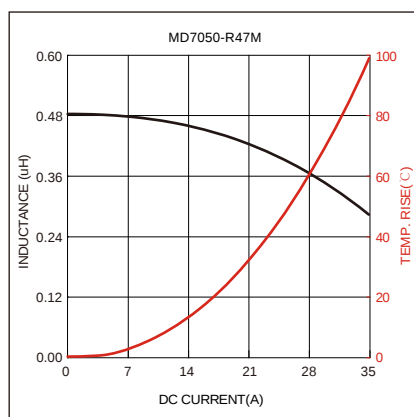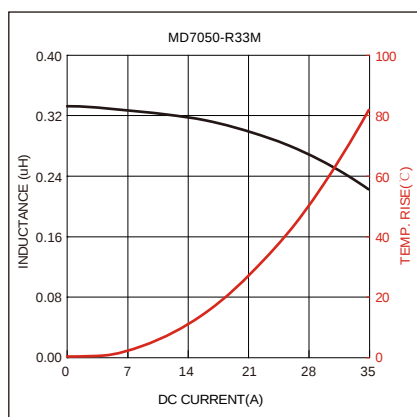

Typical Electrical Characteristics:

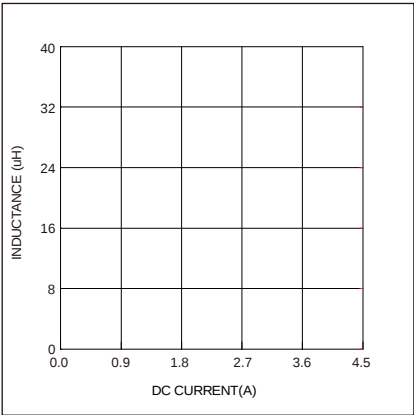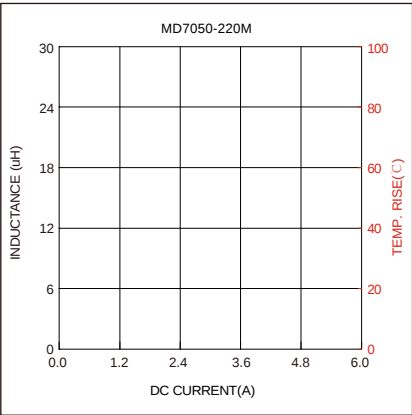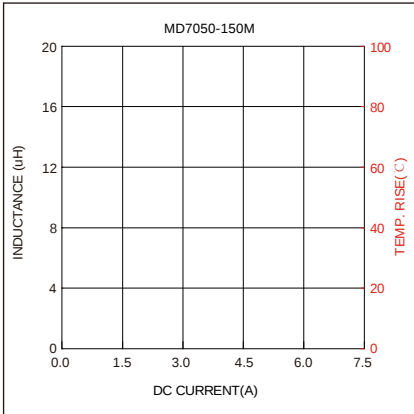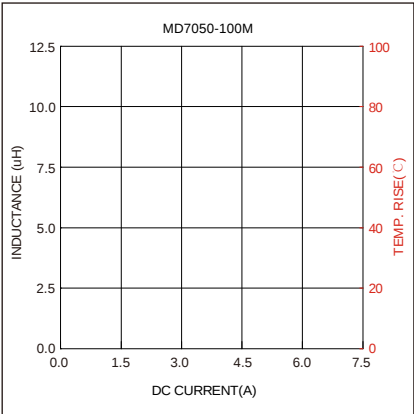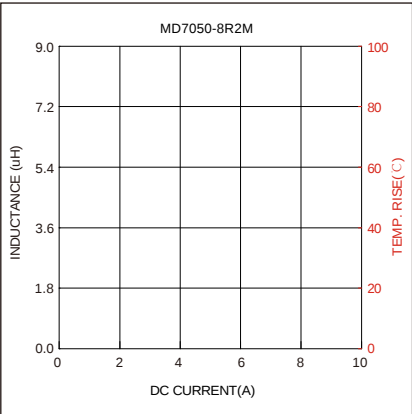

TEM