

MDE Series




FEATURES

- High rated current
- Frequency up to 3 MHz
- 125 °C
- Low core loss
-
- Halogen Free & ROHS compliant
-
-

APPLICATION


-
- Switch and servers
-
-
-
- SSD modules

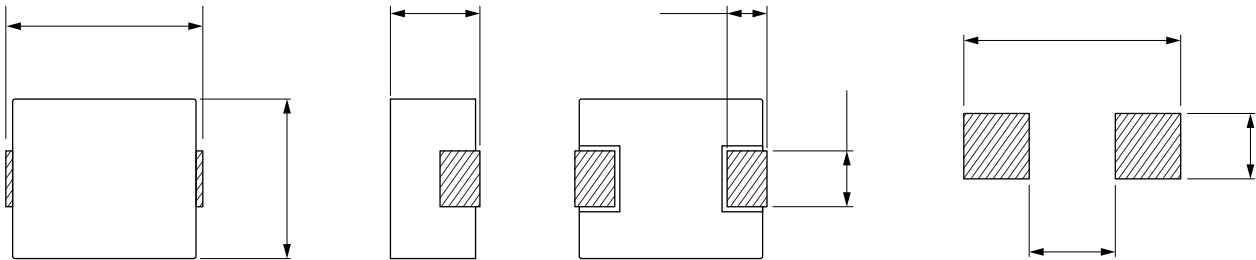

	(μ H)		(m Ω)	Saturation	
				22.5	
			13.5	13.5	
				12.5	
			39.5		
			235		



Inductance (μH)

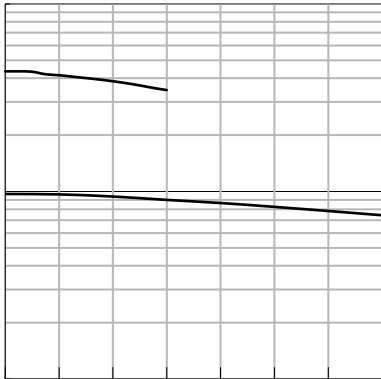

$^{\circ}\text{C}$

