


MDTE Series

Wire Wound Molded SMD Power Inductors

Size 20121A




FEATURES

- Soft saturation
- High current, low DCR, high efficiency
- Very low acoustic noise and very low leakage flux noise
- High reliability
- 100% Lead(Pb)-Free and RoHS compliant
- Operating temperature -40~+125 °C (Including self - temperature rise)
- Quantity: 3000pcs


APPLICATION

- Note PC power system, incl. IMVP-6
- DC/DC converter

Dimensions: [mm]

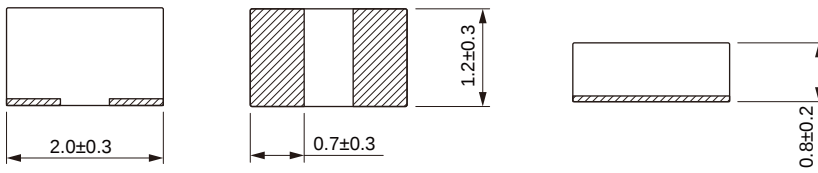

Land Pattern: [mm]












Electrical Properties:

			Saturation	Saturation			
	(μH)		(A)	(A)	(A)	(A)	(mΩ)
MDTE20121A-R10M	0.10	±20%	8.5	8.0	7.5	7.0	13
MDTE20121A-R22M	0.22	±20%	7.3	6.8	7.1	6.5	22
MDTE20121A-R24M	0.24	±20%	7.2	6.7	7.0	6.4	23
MDTE20121A-R33M	0.33	±20%	6.5	6.0	5.5	5.0	32
MDTE20121A-R47M	0.47	±20%	5.5	5.0	4.7	4.3	36
MDTE20121A-R68M	0.68	±20%	5.0	4.5	4.3	4.0	43
MDTE20121A-1R0M	1.00	±20%	4.0	3.5	3.9	3.5	63
MDTE20121A-1R5M	1.50	±20%	3.2	2.7	3.1	2.6	85
MDTE20121A-2R2M	2.20	±20%	2.7	2.4	2.0	1.7	150

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

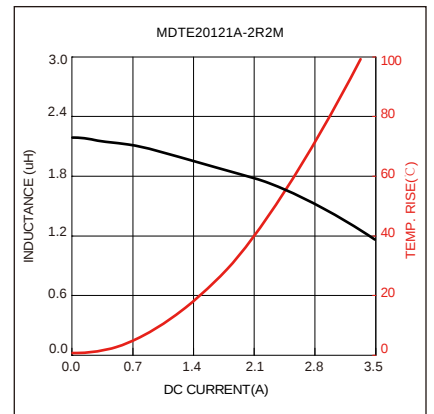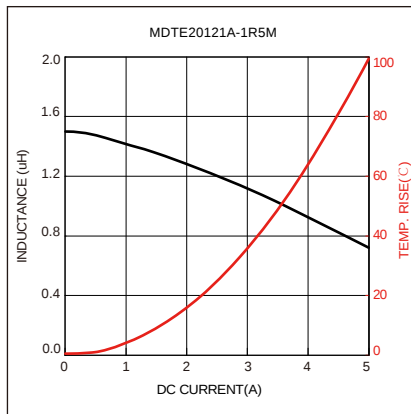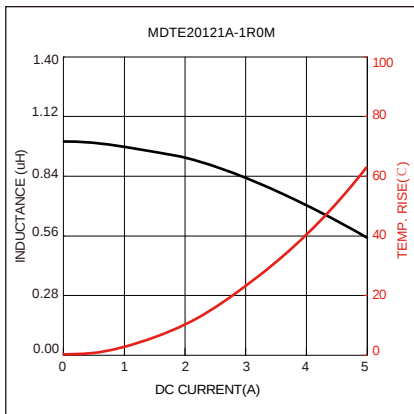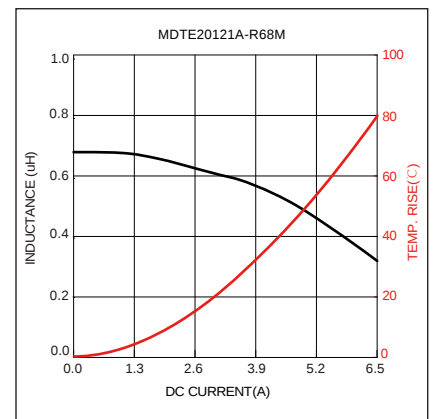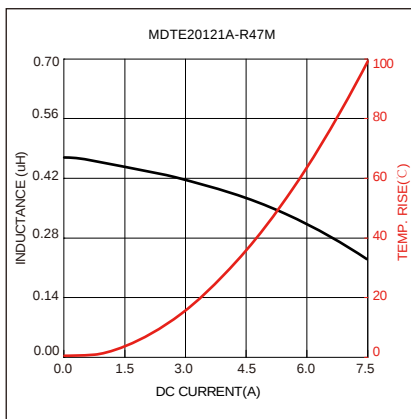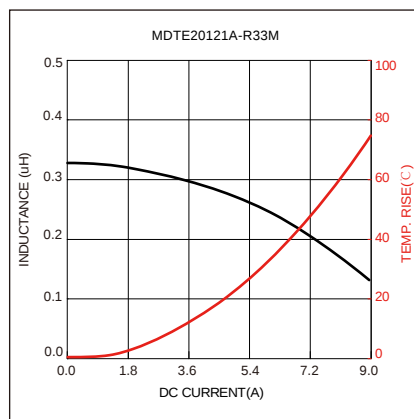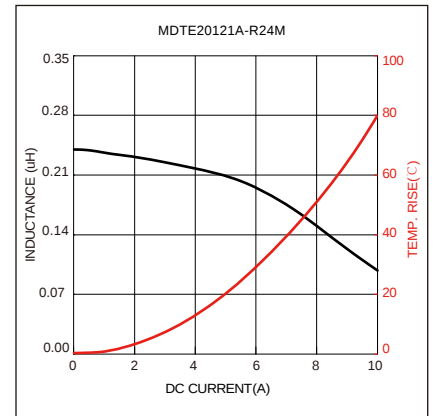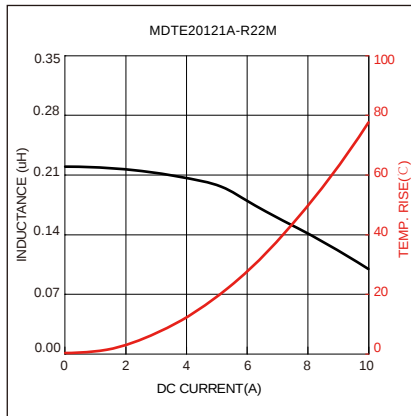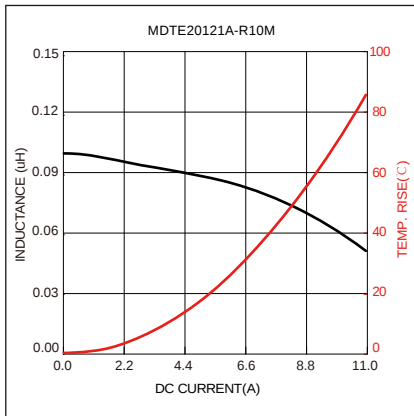

Soldering Reflow:


Packaging Information:

Tape Dimension:




Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
MDTE20121A	1.5 ± 0.1	2.3 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	1.2 ± 0.1	1.75 ± 0.1	0.25 ± 0.05

Peel force of top cover tape:

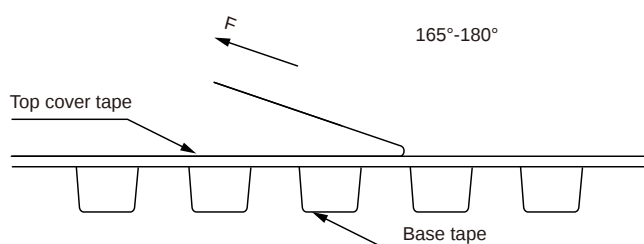


The peel force of top cover tape shall be between 0.1 to 0.98 N

Reel Dimension: [mm]

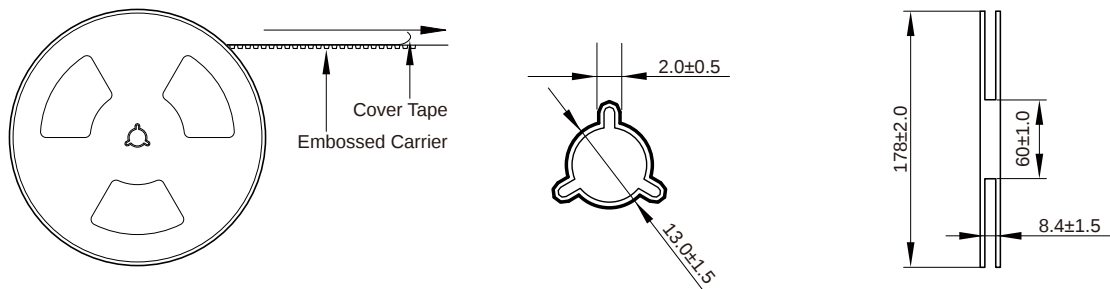

Packaging Quantity:

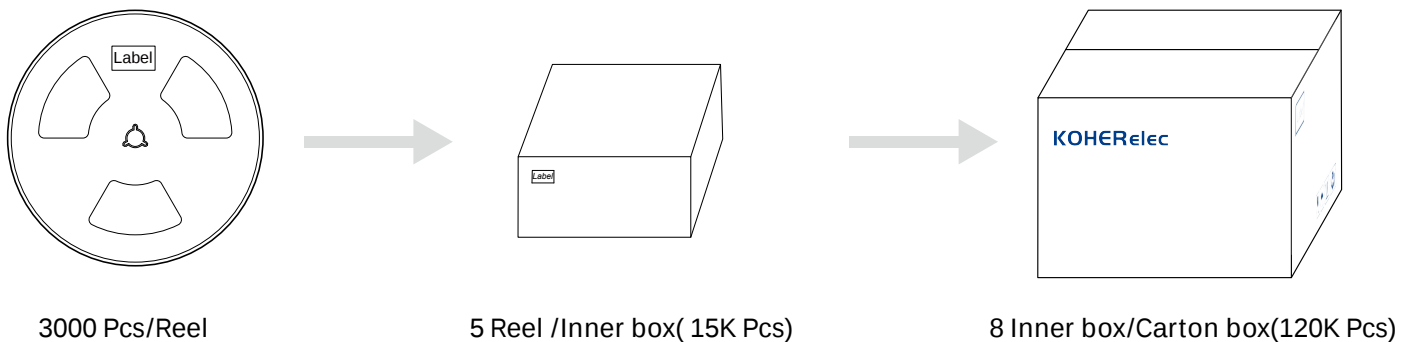

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.