

SCM Series





FEATURES

-
-
-
-
-

℃







APPLICATIONS


-
-
-
-
-



	(μH)		(Ω)			(Ω)	
SCM6033-110Y	11	+50%/-30%	0.18	0.3	80	800	250
SCM6033-220Y	22	+50%/-30%	0.23	0.3	80	1500	250
SCM6033-330Y	33	+50%/-30%	0.27	0.3	80	2000	250
SCM6033-510Y	51	+50%/-30%	0.32	0.4	80	2500	250
SCM6033-101Y	100	+50%/-30%	0.58	0.3	80	4000	250
SCM6033-471Y	470	+50%/-30%	0.35	0.4	80	2200	250



△

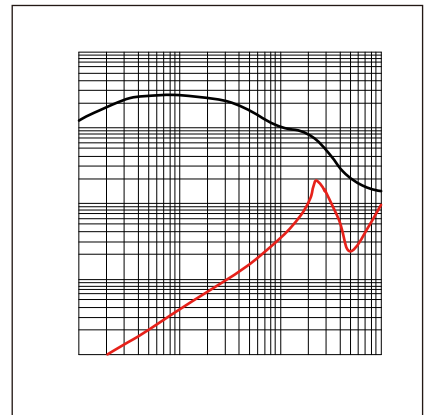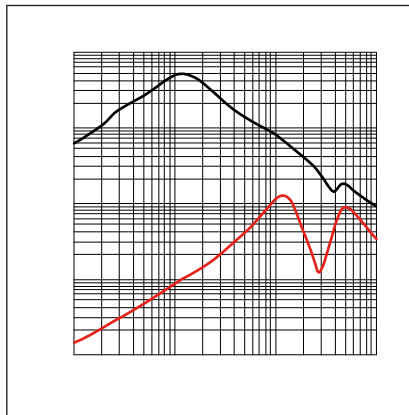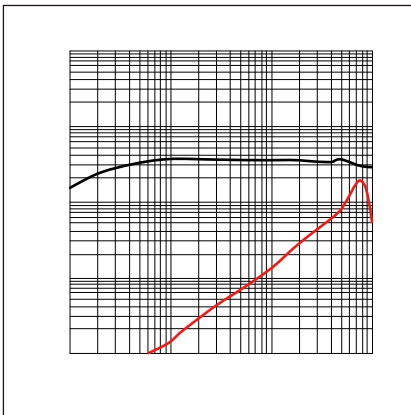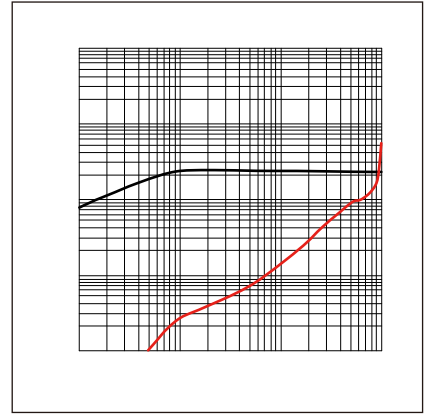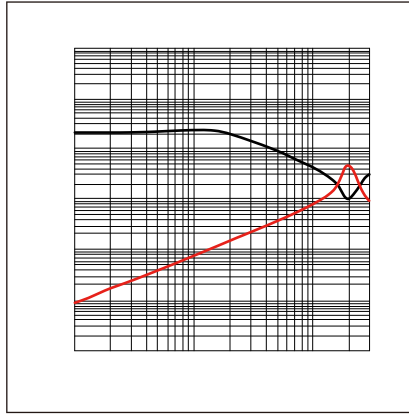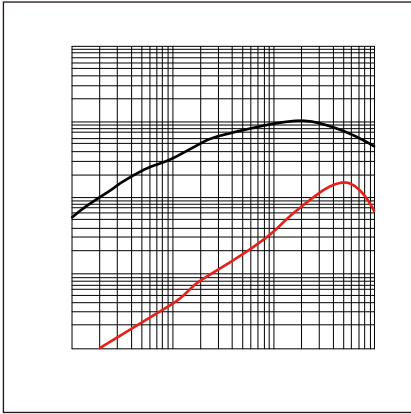

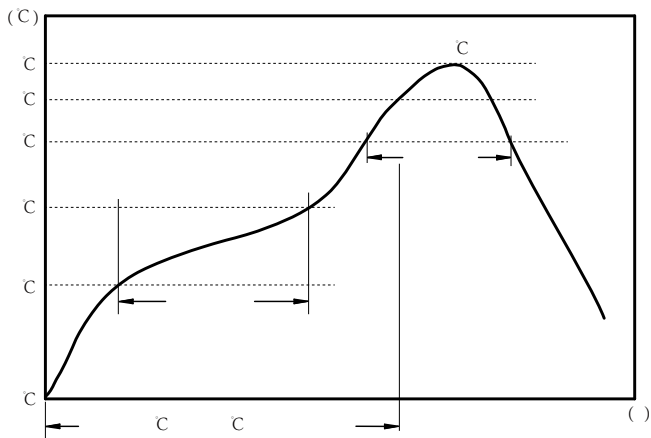


C
C
C

:

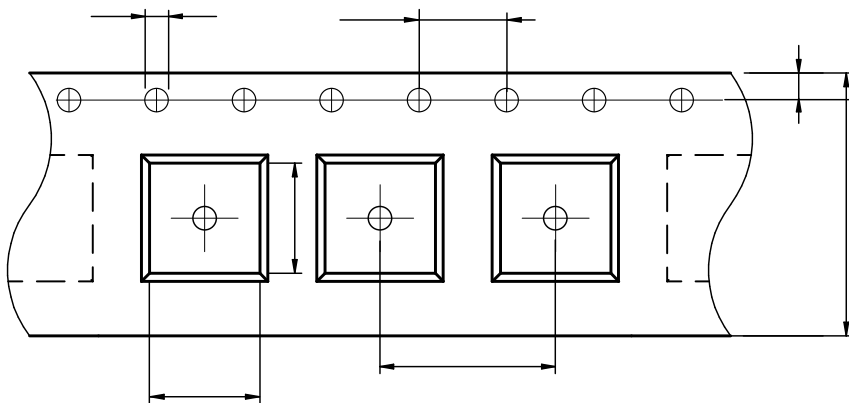





SCM6033	4.00±0.1	6.80±0.1	1.5±0.1	4.0±0.1	8.0±0.1	16.0±0.3	3.4±0.1	1.75±0.1	0.35±0.05

Marking	Printing (Inductance)
---------	-----------------------

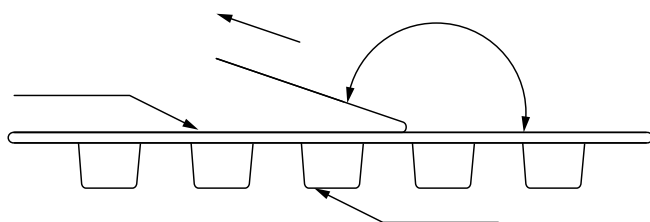


The peel force of top cover tape shall be between 0.1 to 1.17 N


:

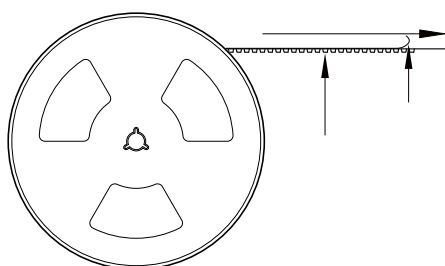

2000 Pcs/Reel



3 Reel /Inner box(6000 Pcs)



3 Inner box/Carton box(18K Pcs)

⋮

•

•

•

•

•

•

•

•