

SCM Series

FEATURES

- Suppression of asymmetrical interference coupled in on lines, whereas data signals up to some MHz

▪







noise.




▪


▪

APPLICATION


- CAN bus, FlexRay system

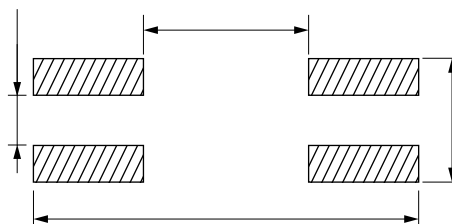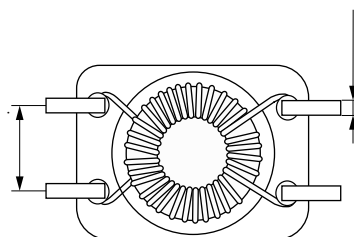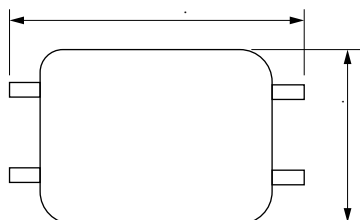

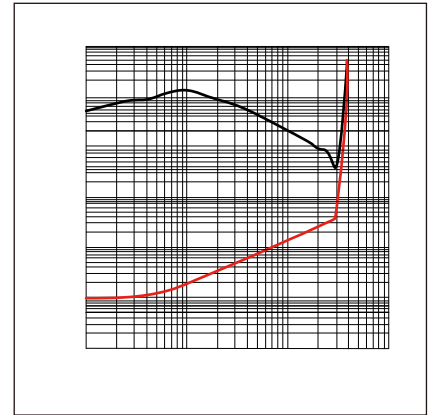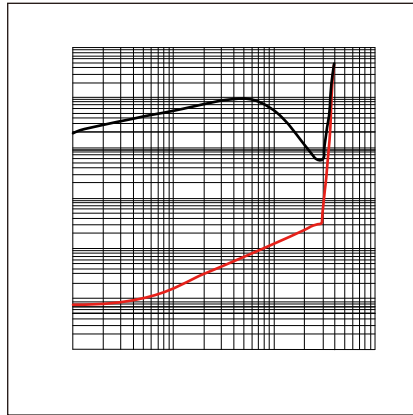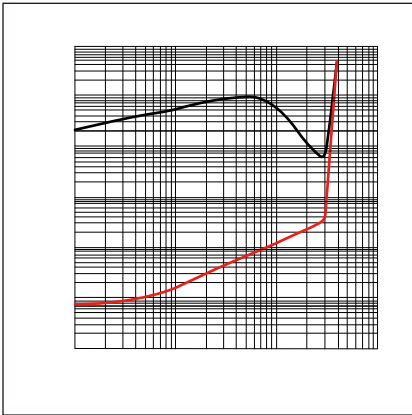

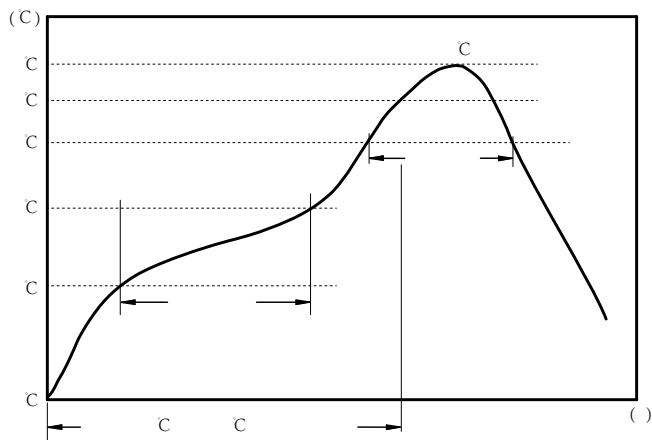


C
C
C

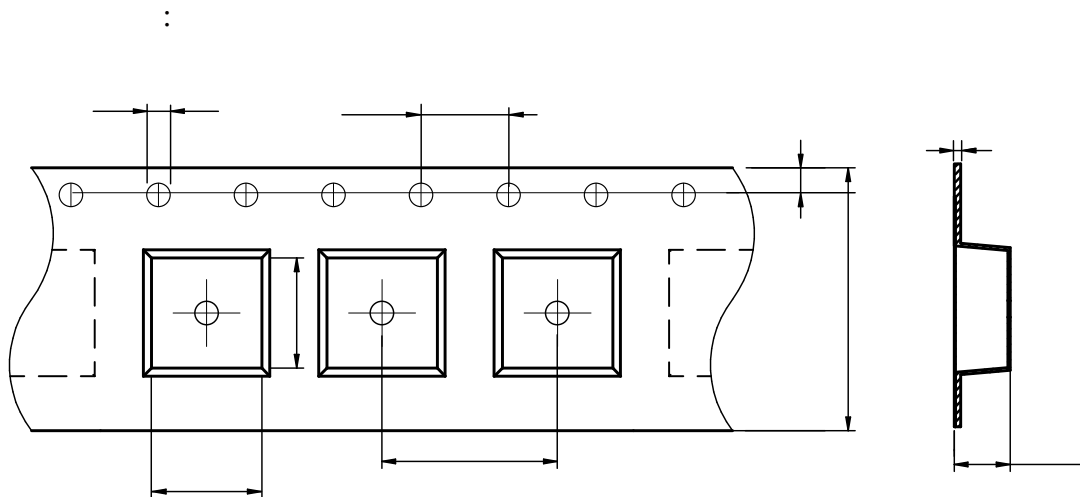





SCM9040	5.85 ± 0.1	9.60 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	16.0 ± 0.3	4.92 ± 0.1	1.75 ± 0.1	0.50 ± 0.05

Marking	Printing (Inductance)
---------	-----------------------

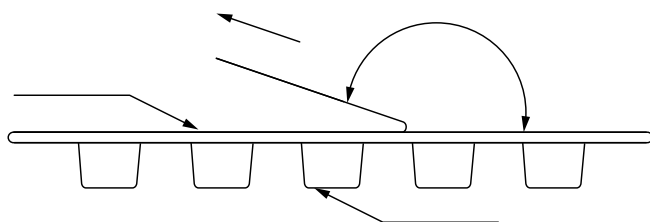


The peel force of top cover tape shall be between 0.1 to 1.17 N


:

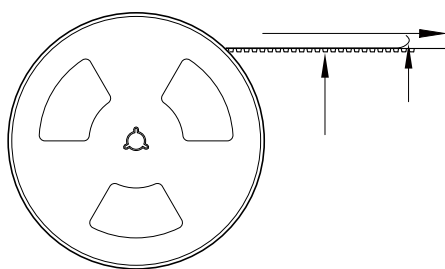

1500 Pcs/Reel



3 Reel /Inner box(4500 Pcs)



3 Inner box/Carton box(13.5K Pcs)

:

•

•

•

•

•

•

•

•

•

•

•

•

•