







.....



或



Percent of rated I rms

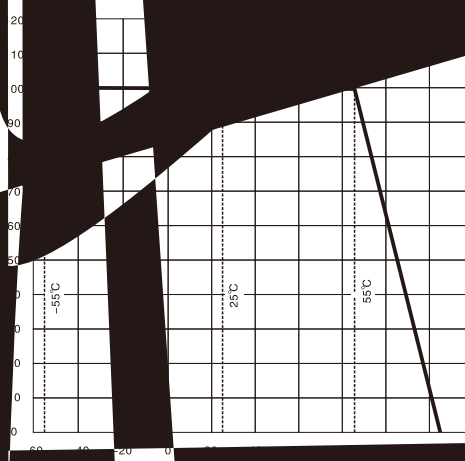



Ambi

Current derating at ambient temperature

降额使用


曲线



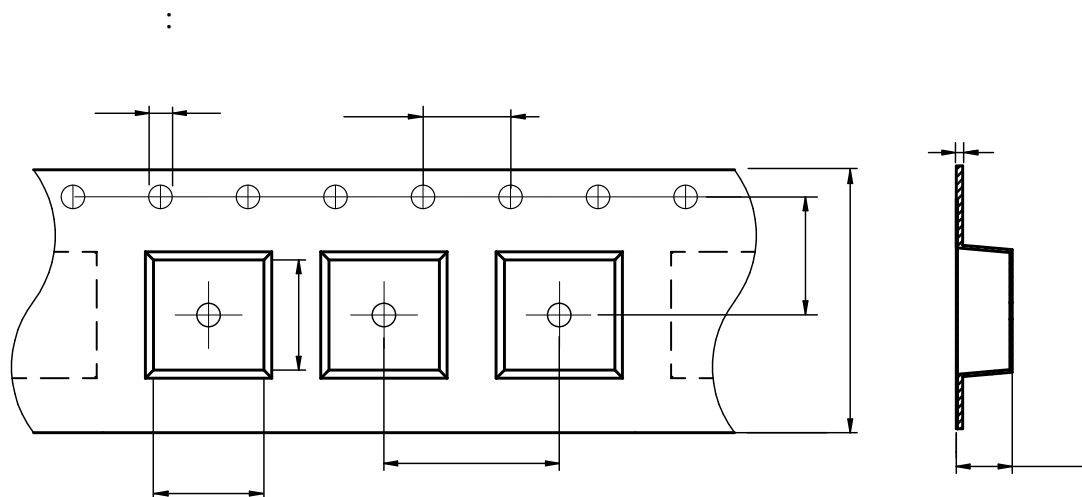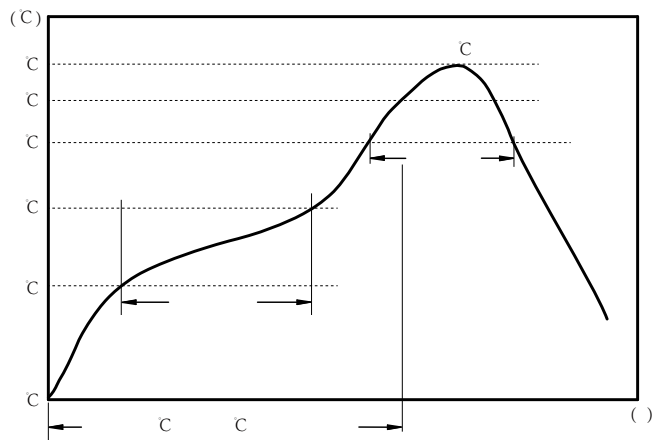





6.80 ± 0.1	9.40 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	2.9 ± 0.1	7.5 ± 0.1	0.35 ± 0.05

Marking	Printing (Inductance)
---------	-----------------------

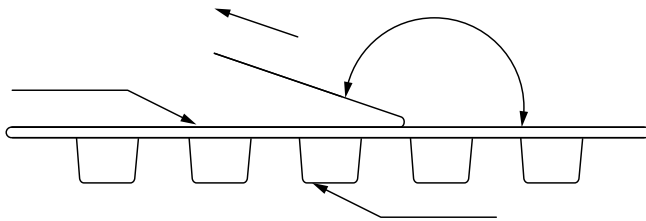


The peel force of top cover tape shall be between 0.1 to 1.17 N


:

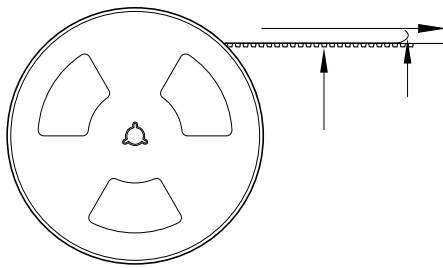

1500 Pcs/Reel



2 Reel /Inner box(3K Pcs)



3 Inner box/Carton box(9K Pcs)

:

•

•

•

•

•

•

•

•